



2000 SUBFLOOR

CONSTRUCTION ADHESIVE



**STRONG
DURABLE
BOND**

DAP® 2000 SUBFLOOR Construction Adhesive


is a VOC compliant construction adhesive specifically formulated for subfloor and deck installation. This subfloor adhesive prevents floor squeaks and improves the structural performance of floor assembly when used properly. The 2000 SUBFLOOR is an easy-to-gun adhesive that delivers a strong durable bond.

LATEX FORMULA

**PREVENTS
FLOOR SQUEAKS**

EASY TO GUN

VOC COMPLIANT

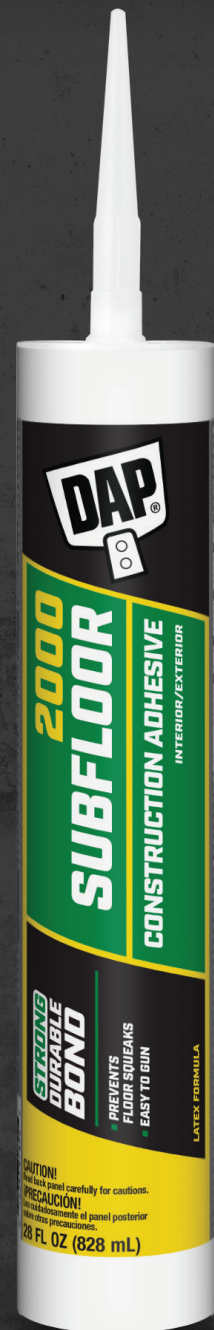

2000 SUBFLOOR

LATEX
FORMULA

SUBFLOOR • WOOD-TO-WOOD ASSEMBLIES • GLUED FLOOR SYSTEMS • DECK INSTALLATION



**STRONG
DURABLE
BOND**

VOC COMPLIANT

**PREVENTS FLOOR SQUEAKS & IMPROVES
THE STRUCTURAL PERFORMANCE**

MULTI-MATERIAL ADHESION



FEATURES & BENEFITS

- Strong Durable Bond
- Prevents Floor Squeaks
- Easy to Gun
- Application Temperature Range: 40F° - 100°F
- Service Temperature Range: 0F° - 140°F
- 15 Minute Working Time
- Interior / Exterior

COVERAGE

28 FL OZ
1/4" bead yields 86 linear feet
3/8" bead yields 38 linear feet

DESCRIPTION	SIZE	CASE PACK / PALLET	PRODUCT CODE	GTIN14	CASE WEIGHT (LB)	CASE DIMS (LXWXH)	CASE VOL (CU FT)
2000 SUBFLOOR	28 FL OZ	12 / 60	0 70798 27515 7	100 70798 27515 4	34	10.875" X 8.25" X 17.125"	0.89