



7000[®] SUBFLOOR

CONSTRUCTION ADHESIVE



**HIGH
STRENGTH**
**WEATHERPROOF
BOND**

DAP[®] 7000[®] SUBFLOOR Construction Adhesive

is specifically formulated for subfloor and deck installation. Using this VOC compliant, solvent-based adhesive during the installation process prevents floor squeaks and improves the structural performance of the floor assembly.

LOW VOC SOLVENT

**BONDS WET, FROZEN
& TREATED LUMBER**

**MEETS / EXCEEDS
ASTM D3498**

**PREVENTS
FLOOR SQUEAKS**



DANGER! EXTREMELY FLAMMABLE LIQUID & VAPOR. VAPORS MAY CAUSE FLASH FIRE. HARMFUL OR FATAL IF SWALLOWED. Read back panel carefully for other cautions.
PELIGRO! VAPOR Y LIQUIDO EXTREMAMENTE INFLAMABLE. ES LOS VAPORES PUESEN CAUSAR INCENDIOS INSTANTANEOS. ES DAÑINO O LETAL SI SE INGERE. Lea cuidadosamente el panel posterior sobre otras precauciones.
28 FL. OZ (828 mL)

7000[®] SUBFLOOR

LOW VOC
SOLVENT


SUBFLOOR • WOOD-TO-WOOD ASSEMBLIES • GLUED FLOOR SYSTEMS • DECK INSTALLATION

**HIGH
STRENGTH**
**WEATHERPROOF
BOND**

VOC COMPLIANT

**PREVENTS FLOOR SQUEAKS & IMPROVES
THE STRUCTURAL PERFORMANCE**


MULTI-MATERIAL ADHESION

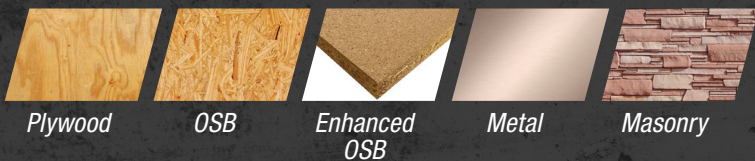

WET



FROZEN



TREATED

- Bonds Wet, Frozen & Treated Lumber
- Meets / Exceeds ASTM D3498

FEATURES & BENEFITS

- Easy to Gun in Cold Temperatures
- Application Temperature Range: 0°F - 120°F
- Service Temperature Range: -20°F - 140°F
- 15 Minute Working Time
- Meets / Exceeds ASTM D3498
- VOC Compliant
- Interior / Exterior

COVERAGE

28 FL OZ

1/4" bead yields 86 linear feet

3/8" bead yields 38 linear feet

DESCRIPTION	SIZE	CASE PACK / PALLET	PRODUCT CODE	GTIN14	CASE WEIGHT (LB)	CASE DIMS (LXWXH)	CASE VOL (CU FT)
7000 [®] SUBFLOOR	28 FL OZ	12 / 60	0 70798 27042 8	100 70798 27042 5	33	10.875" X 8.25" X 17.125"	0.89