

JELD-WEN®

INTERIOR DOORS

**MOLDED | FLUSH | MODA® | KARONA®
AUTHENTIC WOOD**



INTERIOR DOORS FOR EVERY SPACE

JELD-WEN offers a complete line of interior doors that fit every style and budget. With one of the widest selections available, there's an interior door for every application. Find interior door solutions that inspire — from traditional design to contemporary simplicity to luxury craftsmanship.



INTERIOR DOORS AT A GLANCE



MOLDED

So many possibilities for transforming a room, with your choice of designs and colors.

PAGES 6-25



FLUSH

Keep it simple. Dependable, economical doors that combine strength and beauty.

PAGES 26-29



MODA®

Clean lines, stunning effect come together in a complete line of doors for every space.

PAGES 30-33



KARONA®

Luxury stile & rail doors that get the finer details right. Beautifully crafted and constructed to last, with full customization capabilities.

PAGES 34-41



AUTHENTIC WOOD

The beauty of real wood, with quality craftsmanship and reliable performance that stands up to environmental changes.

PAGES 42-47



MOLDED


ADD STYLE TO YOUR SPACES

With a wide variety of panel designs to choose from, there's a door for every aesthetic. Explore all the options to find the ideal complement to your room.


MOLDED DOOR OPTIONS

STICKING PROFILES


Choose from traditional or contemporary sticking profiles.




CRAFTSMAN STICKING



STEPPED STICKING




OVOLO STICKING




COVE & BEAD STICKING


AVAILABLE SIZES



14 WIDTHS BETWEEN 1'0" - 3'0"




HEIGHTS OF 6'8", 7'0", OR 8'0"



THICKNESSES OF 1-3/8" OR 1-3/4"

CORE OPTIONS




PROCORE® SOLID CORE

Combination wood/
MDF or all-wood frame



20-minute
fire rating




SOLID MINERAL CORE

All-wood frame



45 or 60-minute*
fire rating

*Available in raised
panel designs only



HOLLOW CORE

Wood/MDF frame

Blocking behind
panels for support

FINISHING OPTIONS

Choose the stain or paint that suits your style. We'll do the work. Our factory finish process saves you time and creates a more durable finish than an at-home paint job.

PAINTED *

Fresh colors add character to your spaces. Whether you prefer light or dark, there's a color for you.



Modern White



Brilliant White



Ash



Desert Sand



Linen



Reclaimed Bark



Gray Pearl



Marine



Harvest



Clay Hearth



Blush Silk



Sunset Quartz



Warm Hibiscus



Cranberry



Currant



Dark Chocolate



Surf



Flower Sprout



Organic Gray



Renew



Serenity



Salty Tide



Colony



Revival Blue



Fresh Fig



Chestnut Bronze



Black

WOODVIEW™ COLLECTION *

Woodview™ Collection finishing involves a two-tone color process, creating the look of real wood without the maintenance.



Amaretto



Chocolate



Espresso



Hazelnut

*1-Year Factory Applied Prefinish Limited Warranty. For details, visit jeld-wen.com, click Support, and select JELD-WEN Warranties.

Actual colors may vary from samples shown due to printing process and/or differing monitor calibrations.



STATEMENT™ DENIM ON SANTA FE™

STATEMENT™ COLLECTION *

Statement™ Collection finishing delivers an artisan, hand-brushed effect. On-trend colors and texture blend for a beautiful appearance.



Black Cherry



Denim



Juniper




Saffron




Stone


RAISED PANEL




CARRARA®
Smooth
Cove & Bead Sticking
6'8", 7'0", & 8'0"
Product Details pg. 12




CAIMAN®
Smooth
Cove & Bead Sticking
6'8", 7'0", & 8'0"
Product Details pg. 13




CAMDEN®
Textured
Cove & Bead Sticking
6'8" & 7'0"
Product Details pg. 14




SANTA FE™
Smooth
Ovolo Sticking
6'8", 7'0", & 8'0"
Product Details pg. 15




ROCKPORT™
Smooth
Cove & Bead Sticking
6'8", 7'0", & 8'0"
Product Details pg. 16



COLONIST®
Smooth
Cove & Bead Sticking
6'8", 7'0", & 8'0"
Product Details pg. 17




COLONIST®
Textured
Cove & Bead Sticking
6'8", 7'0", & 8'0"
Product Details pg. 17




IMPRESSION™ MIRROR
Textured
6'8" Only
Opposite Side Colonist® Textured
Product Details pg. 25

Selection varies by market. See your JELD-WEN sales representative for details.


FLAT PANEL




MADISON®
Smooth
Craftsman Sticking
6'8", 7'0", & 8'0"
Product Details pg. 18




MONROE®
Smooth
Craftsman Sticking
6'8", 7'0", & 8'0"
Product Details pg. 19




BIRKDALE™
Smooth
Craftsman Sticking
6'8", 7'0", & 8'0"
Product Details pg. 20



CRAFTSMAN III™
Smooth
Craftsman Sticking
6'8" & 7'0"
Product Details pg. 21




CONMORE®
Smooth
Stepped Sticking
6'8" & 7'0"
Product Details pg. 22




STUDIO™
SL100*
Molded
6'8" & 7'0"
Product Details pg. 23

For bifold product details, see pg. 25


ADA - COMPLIANT DESIGNS




CARRARA®
Smooth
Cove & Bead Sticking
6'8"
Product Details pg. 24




CAIMAN®
Smooth
Cove & Bead Sticking
6'8"
Product Details pg. 24



COLONIST®
Smooth Wide Stile
Cove & Bead Sticking
6'8" & 7'0"
Product Details pg. 24



MADISON®
Smooth
Craftsman Sticking
6'8"
Product Details pg. 24



CRAFTSMAN III™
Smooth
Craftsman Sticking
6'8"
Product Details pg. 24

MORE OPTIONS


Beyond these designs, some of our other molded designs in specific sizes meet ADA-compliant standards by nature of their dimensions and construction.

Selection varies by market. See your JELD-WEN sales representative for details.

*SL100 is not fire rated, no mineral core option provided.

SL100 not recommended for use with double door or bifold door applications due to alignment issues.


CARRARA®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-15/16"	3" (1'6") 4" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'0") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	17-11/16"	5-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32" (2'8") 6-5/32" (2'10")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23-11/16"	6-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7-1/16"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	11-15/16"	3" (1'6") 4" (1'8")	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
1'10" 2'0" 2'2"	8'0"	Two	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
2'4"	8'0"	Two	1-3/8" 1-3/4"	17-11/16"	5-5/32"	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
2'6"	8'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
2'8" 2'10"	8'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32" (2'8") 6-5/32" (2'10")	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•
3'0"	8'0"	Two	1-3/8" 1-3/4"	23-11/16"	6-5/32"	N/A	5-1/4"	6-13/16"	8-1/4"	CB	Smooth	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CAIMAN®

Panel Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-1/16"	1-15/32" (1'0") 2-15/32" (1'2") 2-31/32" (1'3") 3-15/32" (1'4")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-15/16"	3-1/32" (1'6") 4-1/32" (1'8")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	17-11/16"	5-5/32"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32" (2'8") 6-5/32" (2'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23-11/16"	6-5/32"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	6-3/4"	8-1/4" (6'8") 10-1/4" (7'0")	CB	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	9-1/16"	1-15/32" (1'0") 2-15/32" (1'2") 2-31/32" (1'3") 3-15/32" (1'4")	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	11-15/16"	3-1/32" (1'6") 4-1/32" (1'8")	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
1'10" 2'0" 2'2"	8'0"	Two	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
2'4"	8'0"	Two	1-3/8" 1-3/4"	17-11/16"	5-5/32"	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
2'6"	8'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
2'8" 2'10"	8'0"	Two	1-3/8" 1-3/4"	21-11/16"	5-5/32" (2'8") 6-5/32" (2'10")	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•
3'0"	8'0"	Two	1-3/8" 1-3/4"	23-11/16"	6-5/32"	N/A	6-3/4"	6-3/4"	8-1/4"	CB	Smooth	•	•	•


CAMDEN®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6-11/16"	2-21/32"	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-1/2"	3-1/4" (1'2") 3-3/4" (1'3") 4-1/4" (1'4")	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-1/2"	4-1/4" (1'6") 5-1/4" (1'8")	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	14-15/16"	3-17/32" (1'10") 4-17/32" (2'0") 5-17/32" (2'2")	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18-1/8"	4-15/16"	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	19-11/16"	5-5/32"	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	22-13/16"	4-19/32" (2'8") 5-19/32" (2'10")	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	25"	5-1/2"	N/A	4-11/16" (6'8") 6-11/16" (7'0")	3-3/4"	8-13/16" (6'8") 10-13/16" (7'0")	CB	Oak Grain	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



SANTA FE™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	0	Smooth	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	0	Smooth	•	•	•
1'10" 2'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	14"	4" (1'10") 5" (2'0")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	0	Smooth	•	•	•
2'2" 2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18"	4" (2'2") 5" (2'4")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	0	Smooth	•	•	•
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	21"	4-1/2"	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	0	Smooth	•	•	•
2'8"	6'8" 7'0"	Two	1-3/8" 1-3/4"	23"	4-1/2"	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	0	Smooth	•	•	•
2'10" 3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	24"	5" (2'10") 6" (3'0")	N/A	4-1/2" (6'8") 6-1/2" (7'0")	7"	9-3/4" (6'8") 11-3/4" (7'0")	0	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1-3/8" 1-3/4"	7"	2-1/2" (1'0") 3-1/2" (1'2") 4" (1'3") 4-1/2" (1'4")	N/A	4-3/8"	7"	9-7/8"	0	Smooth	•	•	•
1'6" 1'8"	8'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8")	N/A	4-3/8"	7"	9-7/8"	0	Smooth	•	•	•
1'10" 2'0"	8'0"	Two	1-3/8" 1-3/4"	14"	4" (1'10") 5" (2'0")	N/A	4-3/8"	7"	9-7/8"	0	Smooth	•	•	•
2'2" 2'4"	8'0"	Two	1-3/8" 1-3/4"	18"	4" (2'2") 5" (2'4")	N/A	4-3/8"	7"	9-7/8"	0	Smooth	•	•	•
2'6"	8'0"	Two	1-3/8" 1-3/4"	21"	4-1/2"	N/A	4-3/8"	7"	9-7/8"	0	Smooth	•	•	•
2'8"	8'0"	Two	1-3/8" 1-3/4"	23"	4-1/2"	N/A	4-3/8"	7"	9-7/8"	0	Smooth	•	•	•
2'10" 3'0"	8'0"	Two	1-3/8" 1-3/4"	24"	5" (2'10") 6" (3'0")	N/A	4-3/8"	7"	9-7/8"	0	Smooth	•	•	•


ROCKPORT™



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	5-7/8"	3-1/16"	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
1'2" 1'3" 1'4"	6'8" 7'0"	Five	1-3/8" 1-3/4"	8-7/8"	2-9/16" (1'2") 3-1/16" (1'3") 3-9/16" (1'4")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Five	1-3/8" 1-3/4"	10-1/4"	3-7/8" (1'6") 4-7/8" (1'8")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
1'10" 2'10"	6'8" 7'0"	Five	1-3/8" 1-3/4"	15-3/4"	3-1/8" (1'10") 4-1/8" (2'0")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
2'2" 2'4"	6'8" 7'0"	Five	1-3/8" 1-3/4"	19-3/4"	3-1/8" (2'2") 4-1/8" (2'4")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
2'6"	6'8" 7'0"	Five	1-3/8" 1-3/4"	21-3/4"	4-1/8"	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
2'8"	6'8" 7'0"	Five	1-3/8" 1-3/4"	23-3/4"	4-1/8"	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
2'10" 3'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	25-3/4"	4-1/8" (2'10") 5-1/8" (3'0")	N/A	4-5/8" (6'8") 6-1/2" (7'0")	N/A	8-3/8" (6'8") 10-3/8" (7'0")	CB	Smooth	N/A	•	N/A
1'0" 1'2" 1'3" 1'4" 1'6" 1'8"	8'0"	Six	1-3/8" 1-3/4"	8-1/2"	1-3/4" (1'0") 2-3/4" (1'2") 3-1/4" (1'3") 3-3/4" (1'4") 4-3/4" (1'6") 5-3/4" (1'8")	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Six	1-3/8" 1-3/4"	14-1/2"	3-3/4" (1'10") 4-3/4" (2'0") 5-3/4" (2'2")	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
2'4"	8'0"	Six	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
2'6"	8'0"	Six	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
2'8" 2'10"	8'0"	Six	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A
3'0"	8'0"	Six	1-3/8" 1-3/4"	25-3/4"	5-1/8"	N/A	4-5/8"	4-1/4"	10-1/8"	CB	Smooth	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



COLONIST® TEXTURED & SMOOTH

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 1/4"	6 3/4"	8 1/4"	CB	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Three	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Six	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	N/A	•	N/A
2'4"	6'8" 7'0"	Six	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	N/A	•	N/A
2'6"	6'8" 7'0"	Six	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Six	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	N/A	•	N/A
3'0"	6'8" 7'0"	Six	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	N/A	•	N/A
1'0" 1'2" 1'3" 1'4"	8'0"	Three	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	5 1/4"	6 3/4"	8 1/4"	CB	N/A	•	N/A
1'6" 1'8"	8'0"	Three	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	5 1/4"	6 3/4"	8 1/4"	CB	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Six	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	N/A	•	N/A
2'4"	8'0"	Six	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	N/A	•	N/A
2'6"	8'0"	Six	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	N/A	•	N/A
2'8" 2'10"	8'0"	Six	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	N/A	•	N/A
3'0"	8'0"	Six	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	N/A	•	N/A


MADISON®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0" 1'2"	6'8" 7'0"	One	1-3/8" 1-3/4"	5-3/8"	3-5/16" (1'0") 4-5/16" (1'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
1'3" 1'4" 1'6"	6'8" 7'0"	One	1-3/8" 1-3/4"	7-13/16"	3-9/32" (1'3") 4-3/32" (1'4") 5-3/32" (1'6")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
1'8" 1'10"	6'8" 7'0"	One	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
2'0" 2'2"	6'8" 7'0"	One	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
2'4"	6'8" 7'0"	One	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
2'6"	6'8" 7'0"	One	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	One	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
3'0"	6'8" 7'0"	One	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	C	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4" 1'6"	8'0"	One	1-3/8" 1-3/4"	7-13/16"	2-3/32" (1'0") 3-3/32" (1'2") 3-19/32" (1'3") 4-3/32" (1'4") 5-3/32" (1'6")	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
1'8" 1'10"	8'0"	One	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
2'0" 2'2"	8'0"	One	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
2'4"	8'0"	One	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
2'6"	8'0"	One	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
2'8" 2'10"	8'0"	One	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•
3'0"	8'0"	One	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4"	N/A	10-1/4"	Flat	C	Smooth	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



MONROE®

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6"	3"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'2" 1'3"	6'8" 7'0"	Two	1-3/8" 1-3/4"	7-1/2"	3-1/2" (1'2") 3-3/4" (1'3")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'0" 1'2" 1'3" 1'4" 1'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	9-1/4"	1-3/8" (1'0") 2-3/8" (1'2") 2-7/8" (1'3") 3-3/8" (1'4") 4-3/8" (1'6")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'8" 1'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'0" 2'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'6"	6'8" 7'0"	Two	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
3'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	7"	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'4" 1'6"	8'0"	Two	1-3/8" 1-3/4"	9-1/4"	3-3/8" (1'4") 4-3/8" (1'6")	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
1'8" 1'10"	8'0"	Two	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
2'0" 2'2"	8'0"	Two	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
2'4"	8'0"	Two	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
2'6"	8'0"	Two	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
2'8" 2'10"	8'0"	Two	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•
3'0"	8'0"	Two	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4"	7"	11-1/8"	C	Smooth	•	•	•


BIRKDALE™



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	6"	3"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'2" 1'3"	6'8" 7'0"	Three	1-3/8" 1-3/4"	7-1/2"	3-1/2" (1'2") 3-3/4" (1'3")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'4" 1'6"	6'8" 7'0"	Three	1-3/8" 1-3/4"	9-1/4"	3-3/8" (1'4") 4-3/8" (1'6")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'8" 1'10"	6'8" 7'0"	Three	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'0" 2'2"	6'8" 7'0"	Three	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'6"	6'8" 7'0"	Three	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
2'8" 2'10"	6'8" 7'0"	Three	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
3'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4" (6'8") 6-3/4" (7'0")	N/A	11-1/8" (6'8") 13-1/8" (7'0")	C	Smooth	•	•	•
1'0"	8'0"	Three	1-3/8" 1-3/4"	6"	3"	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
1'2" 1'3"	8'0"	Three	1-3/8" 1-3/4"	7-1/2"	3-1/4" (1'2") 3-3/4" (1'3")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
1'4" 1'6"	8'0"	Three	1-3/8" 1-3/4"	9-1/4"	3-3/8" (1'4") 4-3/8" (1'6")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
1'8" 1'10"	8'0"	Three	1-3/8" 1-3/4"	11-1/2"	4-1/4" (1'8") 5-1/4" (1'10")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
2'0" 2'2"	8'0"	Three	1-3/8" 1-3/4"	15-1/2"	4-1/4" (2'0") 5-1/4" (2'2")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
2'4"	8'0"	Three	1-3/8" 1-3/4"	18-1/2"	4-3/4"	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
2'6"	8'0"	Three	1-3/8" 1-3/4"	20-1/2"	4-3/4"	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
2'8" 2'10"	8'0"	Three	1-3/8" 1-3/4"	22-1/2"	4-3/4" (2'8") 5-3/4" (2'10")	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
3'0"	8'0"	Three	1-3/8" 1-3/4"	26-1/2"	4-3/4"	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CRAFTSMAN III™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1-3/8" 1-3/4"	4"	4"	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
1'2"	6'8" 7'0"	Two	1-3/8" 1-3/4"	6"	4"	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
1'3" 1'4"	6'8" 7'0"	Two	1-3/8" 1-3/4"	8-1/4"	3-3/8" (1'3") 3-7/8" (1'4")	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
1'6" 1'8" 1'10"	6'8" 7'0"	Two	1-3/8" 1-3/4"	10"	4" (1'6") 5" (1'8") 6" (1'10")	N/A	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
2'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	15"	4-1/2"	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
2'2" 2'4"	6'8" 7'0"	Three	1-3/8" 1-3/4"	17"	4-1/2" (2'2") 5-1/2" (2'4")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
2'6" 2'8"	6'8" 7'0"	Three	1-3/8" 1-3/4"	21"	4-1/2" (2'6") 5-1/2" (2'8")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•
2'10" 3'0"	6'8" 7'0"	Three	1-3/8" 1-3/4"	25"	4-1/2" (2'10") 5-1/2" (3'0")	4-1/2"	4-5/8" (6'8") 6-5/8" (7'0")	N/A	9" (6'8") 11 (7'0")	Flat	C	Smooth	•	•	•


CONMORE®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	6-25/32"	2-19/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
1'2"	6'8" 7'0"	Five	1-3/8" 1-3/4"	9-1/16"	2-15/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
1'3" 1'4" 1'6" 1'8"	6'8" 7'0"	Five	1-3/8" 1-3/4"	9-11/16"	2-21/32" (1'3") 3-5/32" (1'4") 4-5/32" (1'6") 5-5/32" (1'8")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Five	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
2'4"	6'8" 7'0"	Five	1-3/8" 1-3/4"	19-11/16"	4-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
2'6"	6'8" 7'0"	Five	1-3/8" 1-3/4"	21-11/16"	4-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Five	1-3/8" 1-3/4"	23-11/16"	4-5/32" (2'8") 5-5/32" (2'10")	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
3'0"	6'8" 7'0"	Five	1-3/8" 1-3/4"	25-11/16"	5-5/32"	N/A	4-1/4" (6'8") 6-1/4" (7'0")	N/A	8-1/4" (6'8") 10-1/4" (7'0")	Flat	S	Smooth	N/A	•	N/A
1'0"	8'0"	Five	1-3/8" 1-3/4"	6-25/32"	2-19/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
1'2"	8'0"	Five	1-3/8" 1-3/4"	9-1/16"	2-15/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
1'3" 1'4" 1'6" 1'8"	8'0"	Five	1-3/8" 1-3/4"	9-11/16"	2-21/32" (1'3") 3-5/32" (1'4") 4-5/32" (1'6") 5-5/32" (1'8")	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Five	1-3/8" 1-3/4"	15-11/16"	3-5/32" (1'10") 4-5/32" (2'0") 5-5/32" (2'2")	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
2'4"	8'0"	Five	1-3/8" 1-3/4"	19-11/16"	4-5/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
2'6"	8'0"	Five	1-3/8" 1-3/4"	21-11/16"	4-5/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
2'8" 2'10"	8'0"	Five	1-3/8" 1-3/4"	23-11/16"	4-5/32" (2'8") 5-5/32" (2'10")	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A
3'0"	8'0"	Five	1-3/8" 1-3/4"	25-11/16"	5-5/32"	N/A	4-1/4"	N/A	10-1/4"	Flat	S	Smooth	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO

*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.




STUDIO™ SL100

Width	Height	Thickness	Groove Width	Horizontal Grooves	No. of Panels	Panel Height	Head Height	Head Width	No. of Vertical Stripes	No. of Horizontal Stripes	Stripe Width
1'6"	6'8"	1-3/8"	3/8"	4	5	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'8"	6'8"	1-3/8"	3/8"	4	5	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'10"	6'8"	1-3/8"	3/8"	4	5	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'0"	6'8"	1-3/8"	3/8"	4	5	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'2"	6'8"	1-3/8"	3/8"	4	5	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'4"	6'8"	1-3/8"	3/8"	4	5	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'6"	6'8"	1-3/8"	3/8"	4	5	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'8"	6'8"	1-3/8"	3/8"	4	5	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'10"	6'8"	1-3/8"	3/8"	4	5	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
3'0"	6'8"	1-3/8"	3/8"	4	5	16-15/32" Top Panel 16-9/32" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'6"	7'0"	1-3/8"	3/8"	4	5	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'8"	7'0"	1-3/8"	3/8"	4	5	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
1'10"	7'0"	1-3/8"	3/8"	4	5	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'0"	7'0"	1-3/8"	3/8"	4	5	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'2"	7'0"	1-3/8"	3/8"	4	5	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'4"	7'0"	1-3/8"	3/8"	4	5	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'6"	7'0"	1-3/8"	3/8"	4	5	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'8"	7'0"	1-3/8"	3/8"	4	5	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
2'10"	7'0"	1-3/8"	3/8"	4	5	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A
3'0"	7'0"	1-3/8"	3/8"	4	5	18-11/32" Top Panel 18-3/8" Bottom Panel 15-3/4" Center Panels	N/A	N/A	0	0	N/A

ADA-COMPLIANT DESIGNS


CARRARA®, COLONIST®, CRAFTSMAN III™, MADISON®, CAIMAN®

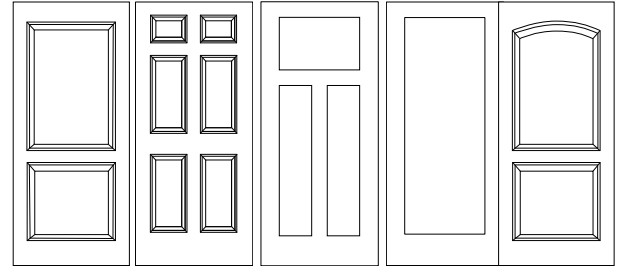

Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	Statement™	Paint	Woodview™
3'0" Carrara®	6'8"	Two	1-3/8" 1-3/4"	23- 11/16"	6-5/32"	N/A	4-1/4"	6-3/4"	11-1/8"	CB	Smooth	•	•	•
2'10" Carrara®	6'8"	Two	1-3/8" 1-3/4"	23- 11/16"	5-5/32"	N/A	4-1/4"	6-3/4"	11-1/8"	CB	Smooth	•	•	•
3'0" Colonist®	6'8" 7'0"	Six	1-3/8" 1-3/4"	9-5/8"	6-1/2"	3-3/4"	5-7/8" (6'8") 7-7/8" (7'0")	6-3/4"	10-5/8" (6'8") 12-5/8" (7'0")	CB	Smooth	N/A	•	N/A
3'0" Craftsman III™	6'8"	Three	1-3/8" 1-3/4"	24-1/2"	5-3/4"	4-1/2"	4-5/8"	N/A	11-1/8"	C	Smooth	•	•	•
2'10" Craftsman III™	6'8"	Three	1-3/8" 1-3/4"	24-1/2"	4-3/4"	4-1/2"	4-5/8"	N/A	11-1/8"	C	Smooth	•	•	•
3'0" Madison®	6'8"	One	1-3/8" 1-3/4"	24-1/2"	5-3/4"	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
2'10" Madison®	6'8"	One	1-3/8" 1-3/4"	24-1/2"	4-3/4"	N/A	4-3/4"	N/A	11-1/8"	C	Smooth	•	•	•
3'0" Caiman®	6'8"	Two	1-3/8" 1-3/4"	23- 11/16"	6-5/32"	N/A	4-3/4"	6-3/4"	11-1/8"	CB	Smooth	•	•	•
2'10" Caiman®	6'8"	Two	1-3/8" 1-3/4"	23- 11/16"	5-5/32"	N/A	4-3/4"	6-3/4"	11-1/8"	CB	Smooth	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO

*Assuming standard bore machining (2-1/8" diameter bore), outer stile measurements listed above must be no less than 3-11/16" in order to accommodate a 2-3/8" backset on the lock hole. For 2-3/4" backsets, outer stile measurements must be no less than 4-1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.




IMPRESSION™ MIRROR

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	Statement™	Paint	Woodview™
2'0"	6'8"	One	1-3/8"	15-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A
2'4"	6'8"	One	1-3/8"	19-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A
2'6"	6'8"	One	1-3/8"	21-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A
2'8"	6'8"	One	1-3/8"	23-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A
3'0"	6'8"	One	1-3/8"	27-3/8"	4-5/16"	N/A	4-1/4"	N/A	9-3/8"	Flat	CB	Pine Grain	N/A	•	N/A

REVERSE IS COLONIST® 6-PANEL TEXTURED ONLY

BIFOLDS



Door Design	Heights	No. of Panels	Thickness	Widths 2 doors or 1 unit	Widths 4 doors or 2 units
Caiman®	6'7"; 6'11"; 7'11"	4	1-3/8"	1'10"; 2'0"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Camden®	6'7"; 6'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Carrara®	6'7"; 6'11"; 7'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Colonist®	6'7"; 6'11"; 7'11"	6	1-3/8"	1'6"; 1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'0"; 3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Conmore®	6'7"; 6'11"	10	1-3/8"	1'10"; 2'0"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Craftsman III™	6'7"; 6'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Madison®	6'7"; 6'11"; 7'11"	2	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Monroe®	6'7"; 6'11"; 7'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Rockport™	6'7"; 6'11"; 7'11"	10	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Santa Fe™	6'7"; 6'11"; 7'11"	4	1-3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Birkdale™	6'7"; 6'11"; 7'11"	6	1-3/8"	1'6"; 1'8"; 1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'0"; 3'4"; 3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"




FLUSH

SIMPLICITY AND RELIABILITY MEET


Our flush interior doors are offered in a variety of colors and woodgrains. They are built to endure everyday life, so you can be confident in their durability. All flush interior doors are available with ProCore The Quiet Door® construction, which reduces sound transmission.

FLUSH DOOR OPTIONS


AVAILABLE SIZES



16 WIDTHS BETWEEN 1'0" - 4'0"




HEIGHTS OF 6'8", 7'0", OR 8'0"



THICKNESSES OF 1-3/8" OR 1-3/4"

CORE OPTIONS




PROCORE® SOLID CORE

Wood or MDF frame



20-minute fire rating




SOLID MINERAL CORE

Mineral composite frame



45-minute, 60-minute, or 90-minute fire rating



HOLLOW CORE

Combination wood/MDF frame

Corrugated honeycomb cell core

FINISHING OPTIONS

You choose whether your flush door arrives unfinished, primed, and/or embossed. Or let us paint your door for you; our factory finish process saves you time and creates a more durable finish than an at-home paint job.

UNFINISHED HARDWOOD VENEER

Choose from several species. Check with your dealer for availability.



Sliced Red Oak
Slab and Bifold



Rotary-Cut Birch
Slab and Bifold



Hardwood (Sapele)
Slab and Bifold

Doors are for interior applications only.



PRIMED AND EMBOSSED HARDWOOD

Primed options arrive ready to paint. Embossed doors offer the look of real stained wood.



Primed



Imperial Oak
Embossed



*1-Year Factory Applied Prefinish Limited Warranty. For details, visit jeld-wen.com, click Support, and select JELD-WEN Warranties.

Actual colors may vary from samples shown due to printing process and/or differing monitor calibrations.

PAINTED *

Fresh colors add character to your spaces. Whether you prefer light or dark, there's a color for you.



FLUSH INTERIOR DOOR FEATURES

Doors	Thickness	Core	Stiles	Top and Bottom Rails	Lock Block	Construction	Standards
Particleboard Core Doors	1-3/8" 1-3/4"	Solid particleboard, mat-formed wood particleboard with density of approximately 28 lbs./cu ft. Meets or exceeds all industry requirements, including ANSI A 208.1, 1-LD-1 or 1-LD-2.	15/16" stile for 1-3/8" thick 1-1/16" stile for 1-3/4" thick	7/8" top rail and 2" bottom rail for 1-3/8" thick 1" top rail and 2-1/4" bottom rail for 1-3/4" thick	n/a	5-ply when using 2-ply hardwood faces	Warnock Hersey International approved to fire endurance tests (1-3/4" only). WHI is an approved ICBO quality control agency.
Hollow Core Doors	1-3/8"	Expanded corrugated honeycomb to provide rigid strength.	15/16"	7/8" top rail and 2" bottom rail	3-1/2" x 16" both sides	5-ply when using 2-ply hardwood faces	n/a
20-Minute Fire Doors (Neutral Pressure)	1-3/4"	Solid particleboard, mat-formed wood particleboard with density of approximately 28 lbs./cu ft. Meets or exceeds all industry requirements, including ANSI A 208.1, 1-LD-1 or 1-LD-2.	1-3/4"	1-3/4"	n/a	5-ply when using 2-ply hardwood faces	Warnock Hersey International approved to fire endurance tests. WHI is an approved ICBO quality control agency.
90-Minute Fire Doors (Neutral Pressure)	1-3/4"	Homogeneous mineral non-asbestos. Meets or exceeds all industry requirements.	1-5/16" composite stile with 5/16" wood band.	1-3/4"	n/a	5-ply when using 2-ply hardwood faces	Warnock Hersey International approved to fire endurance tests. WHI is an approved ICBO quality control agency.




MODA®


MODA® Collection interior doors keep the emphasis on simplicity and clean lines. Conceal or reveal: choose from 21 unique designs with solid, translucent glass, mirror, or clear glass panel options. Regardless of the panel configuration you choose, MODA doors allow you to add sophistication to any space and create a consistent look throughout your home.

MODA® DOOR OPTIONS


PANEL OPTIONS




SOLID PANEL



CLEAR GLASS




TRANSLUCENT GLASS



MIRROR

A full lite mirror on one side and your choice of 21 panel options on the opposite side*

STICKING PROFILES



FLAT PANEL

FINISH OPTIONS



PRIMED




RUSTIC


Available with solid or translucent glass panels only

AVAILABLE SIZES


10" bottom rail is ADA-compliant and comes standard. Custom sizes available.



6 WIDTHS BETWEEN 1'6" - 3'0"




HEIGHTS OF 6'8" OR 8'0"



THICKNESS OF 1-3/8"
RAIL WIDTHS IN 2" OR 3-5/8"

CORE OPTIONS



SOLID CORE

All-wood frame




20-minute
fire rating


Solid core option
available with primed
doors only

*Mirror available on panel door only. No design option available over mirror.
Additional lead times required.


DESIGN OPTIONS




PMC1011
PMP1011
PMT1011
6'8" & 8'0"




PMC1023
PMP1023
PMT1023
6'8" & 8'0"




PMC1023N
PMP1023N
PMT1023N
6'8" & 8'0"




PMC1024
PMP1024
PMT1024
6'8" & 8'0"




PMC1024N
PMP1024N
PMT1024N
6'8" & 8'0"




PMC1031
PMP1031
PMT1031
6'8" & 8'0"




PMC1031N
PMP1031N
PMT1031N
6'8" & 8'0"




PMC1032
PMP1032
PMT1032
6'8" & 8'0"




PMC1033
PMP1033
PMT1033
6'8" & 8'0"



PMC1035
PMP1035
PMT1035
6'8" & 8'0"




PMC1035N
PMP1035N
PMT1035N
6'8" & 8'0"




PMC1036
PMP1036
PMT1036
6'8" & 8'0"


PMP = PANEL, PMT = TRANSLUCENT, PMC = CLEAR




PMC1036N
PMP1036N
PMT1036N
6'8" & 8'0"




PMC1044
PMP1044
PMT1044
6'8" & 8'0"




PMC1044N
PMP1044N
PMT1044N
6'8" & 8'0"




PMC1055
PMP1055
PMT1055
6'8" & 8'0"




PMC1055N
PMP1055N
PMT1055N
6'8" & 8'0"



PMC1066
PMP1066
PMT1066
6'8" & 8'0"



PMC1066N
PMP1066N
PMT1066N
6'8" & 8'0"



PMC1071
PMP1071
PMT1071
6'8" & 8'0"



PMC1072
PMP1072
PMT1072
6'8" & 8'0"




KARONA™


DOORS OF DISTINCTION

Crafted out of a passion for engineering excellence, Karona® doors are known for their high-quality construction. From the warmth of real wood veneer to endless customization options, Karona interior doors are distinctive, beautiful, and designed to last.


KARONA® DOOR OPTIONS




Ogee Sticking



Ovolo Sticking








Mission Sticking








Square Sticking

DOOR STANDARD DIMENSIONS

DESIGNER LINE CONSTRUCTION 1-3/8"

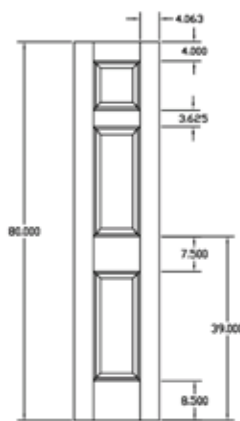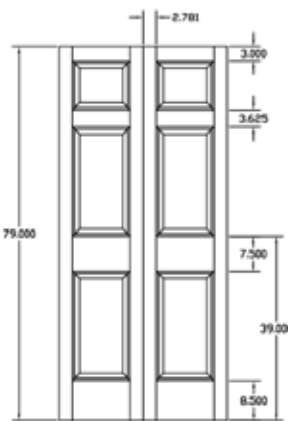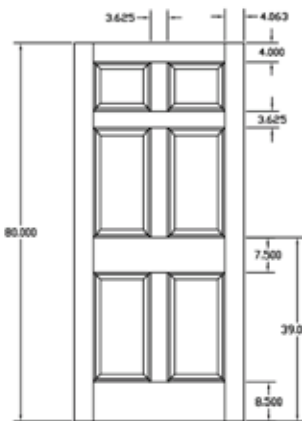

DESIGNER LINE CONSTRUCTION 1-3/4"

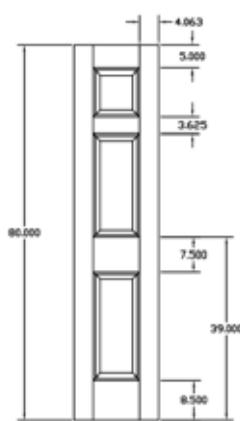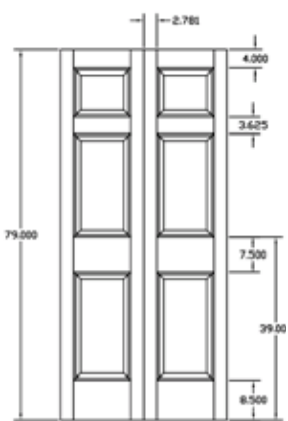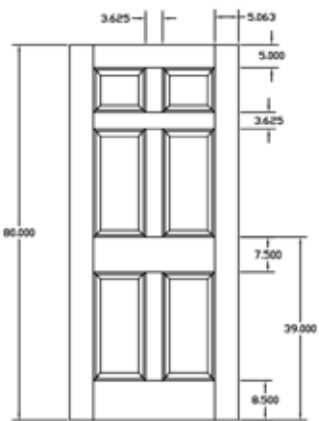


Karona® door sizes determined upon quoting

Some door designs are available with 20-, 45-, 60-, and 90-minute fire rating options for increased protection.


WOOD & GLASS

SPECIES

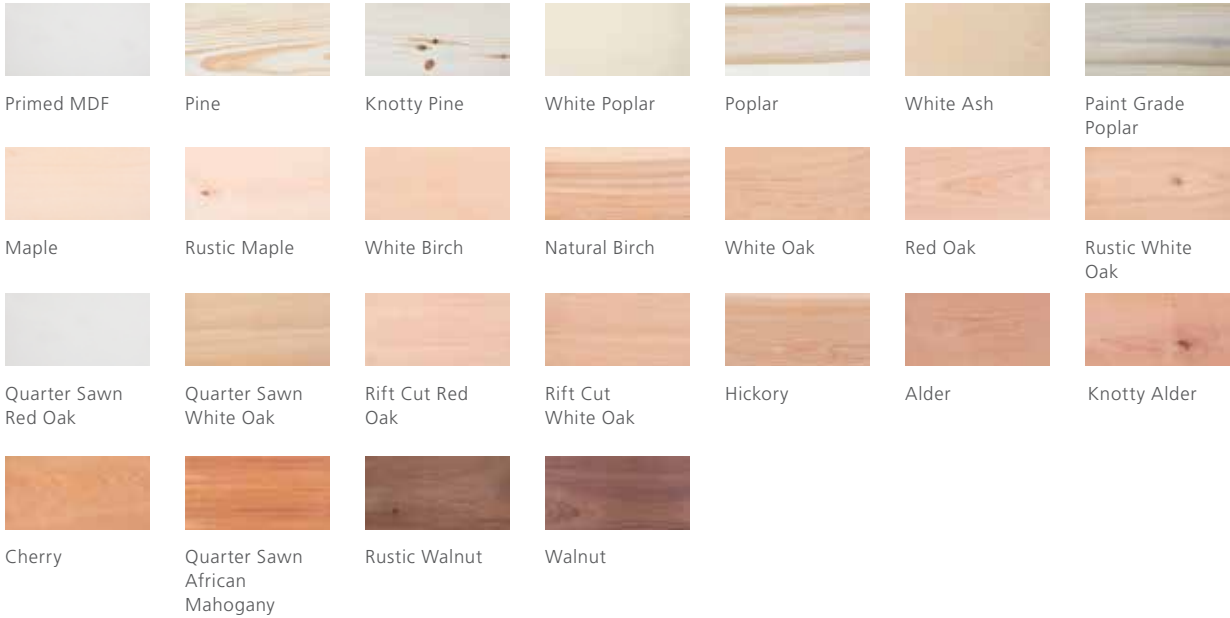


More species available upon request.

GLASS

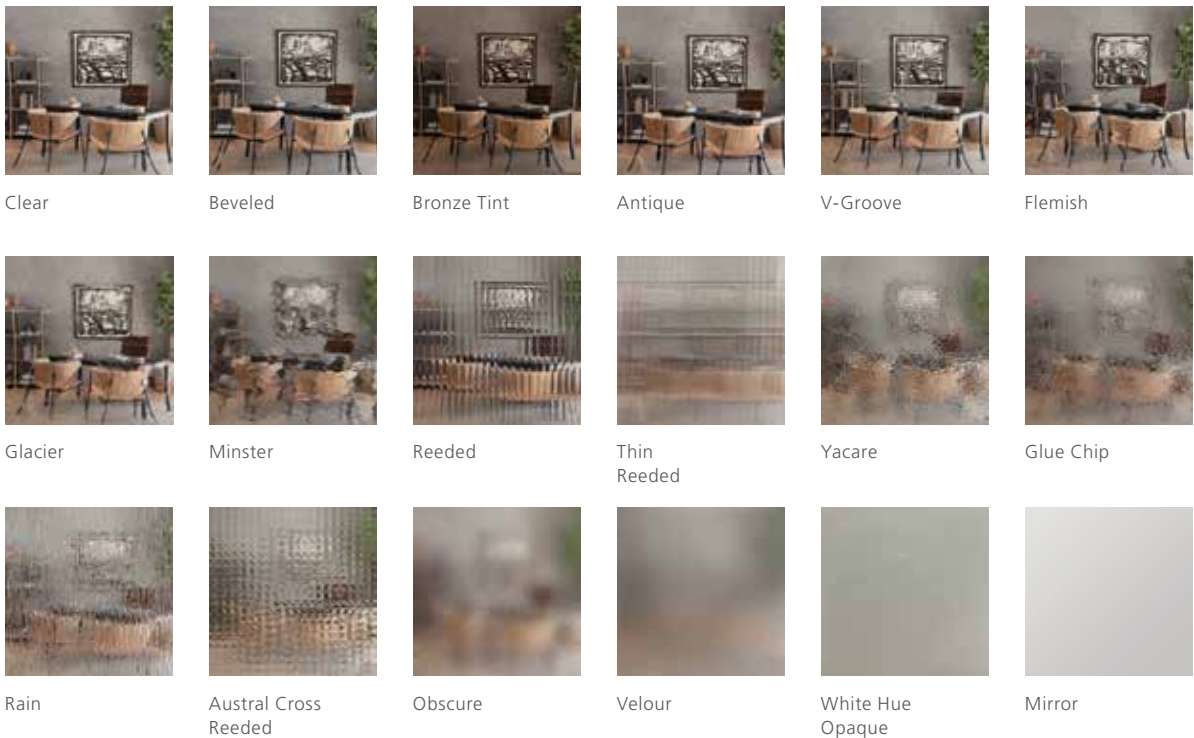


More glass options available upon request.


PANEL DESIGNS

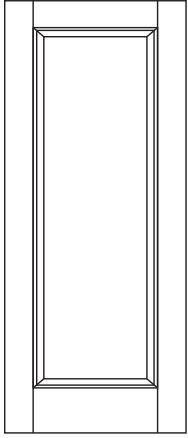


K-6000

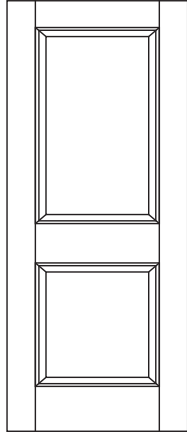


K-4010

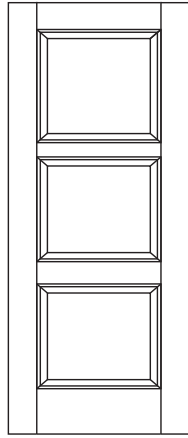


K-5300

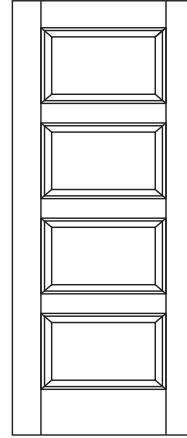


K-3040

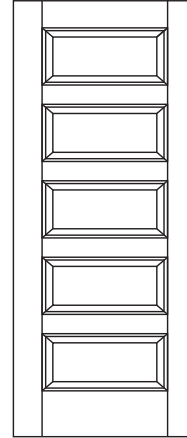


K-3050

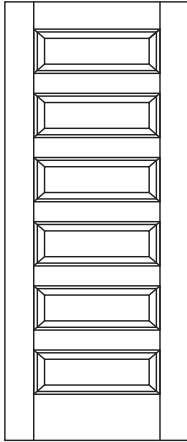


K-3056

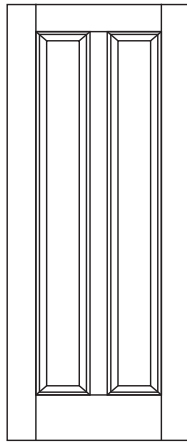


K-5020

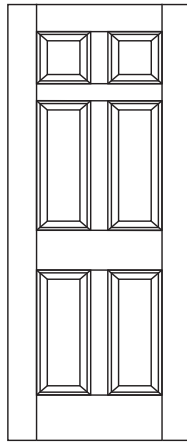


K-5400

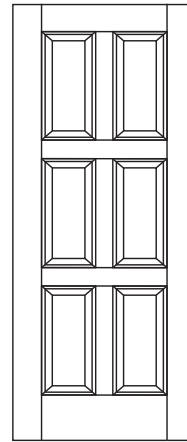


K-5660

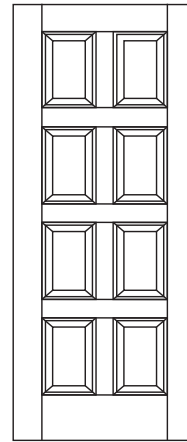


K-5810

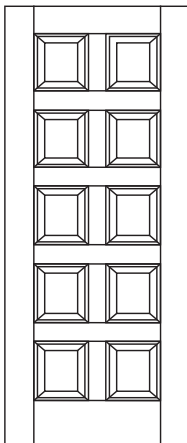


K-3210

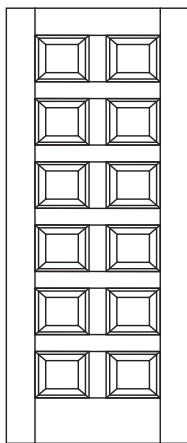


K-3220

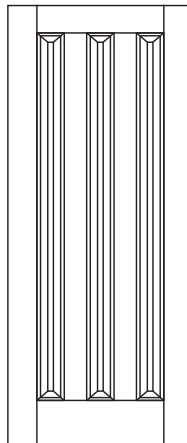

K-3030

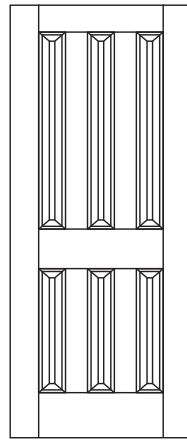


K-3060

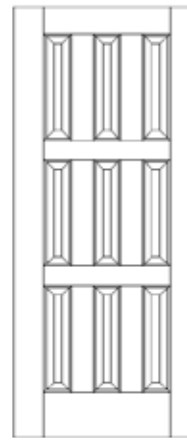


K-3090


All doors also available with flat panels or glass.

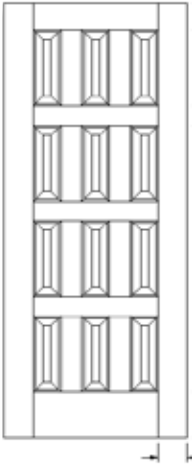


K-3120




K-5930




K-3180




K-5310

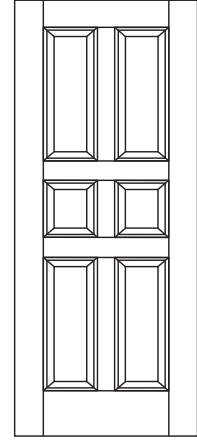


K-5600




K-5500




K-3190




K-3070




K-3080

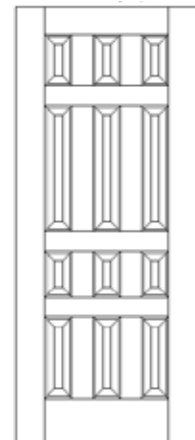


K-3320

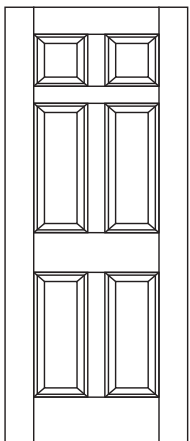

K-5610

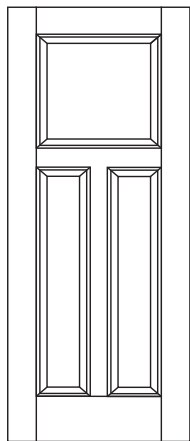


K-5320

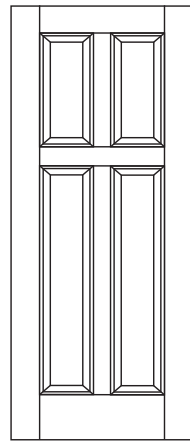


K-5410

All doors also available with flat panels or glass.


FRENCH DOORS




K-6010

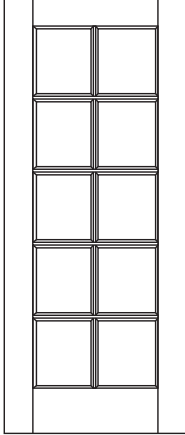


K-6020




K-6080




K-3600




K-3580




K-3700

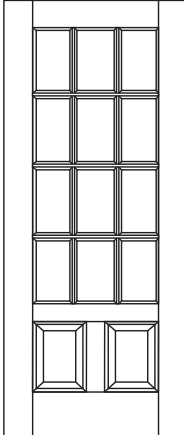


K-3800



K-3820




K-3750

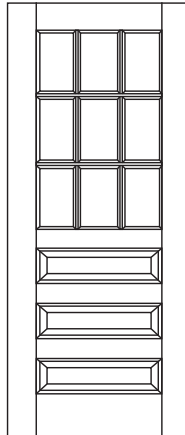

K-3830



K-3840

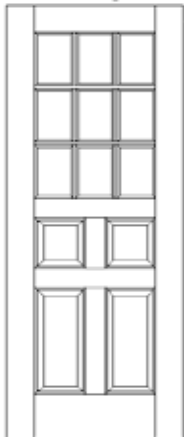

K-6510




K-6090


Available in clear tempered, beveled, V-groove, white hue opaque, and insulating glass

LOUVER DOORS


VENTING LOUVER SLATS

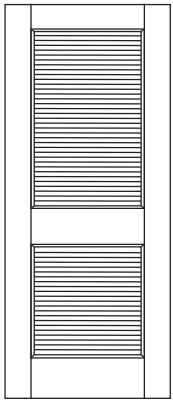


K-7300




K-7320




K-7330



K-7300



K-7320

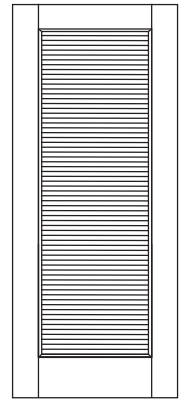


K-7330

NON-VENTING CHEVRON LOUVER


Factory requires louver opening to end with 7/8" measurement. Factory recommends anti-sag bar on doors wider than 36", included only if requested.

Factory requires chevron opening to end with whole number.


BARN DOORS

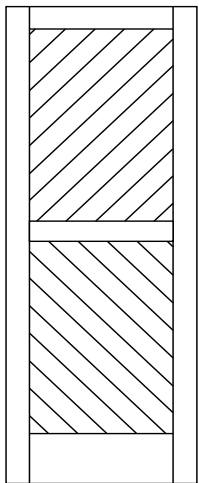


2-Panel Diagonal Plank Veneer

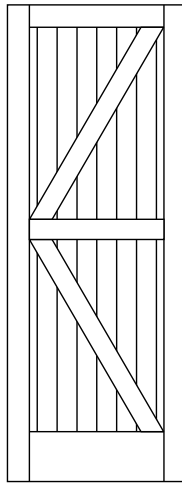


K On Vertical Plank

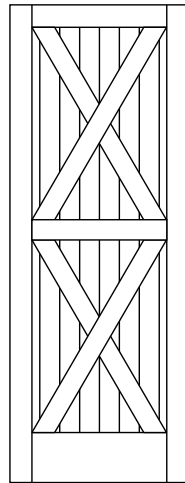

Double X On Vertical Plank

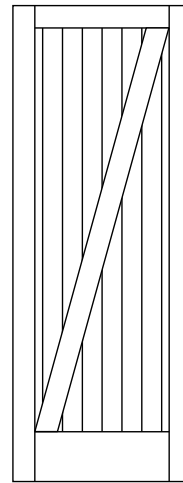


Diagonal On Vertical Plank

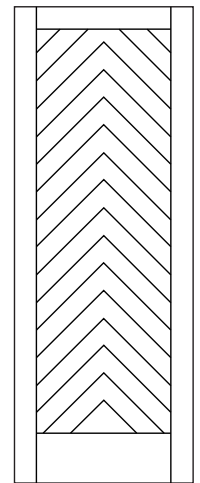


V-Groove Chevron


V - GROOVE & PLANK DOORS




K-8000

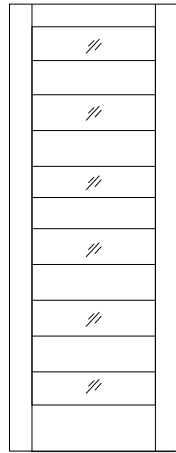


K-8001

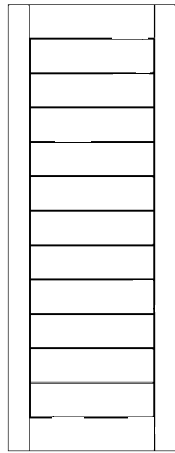


K-8002

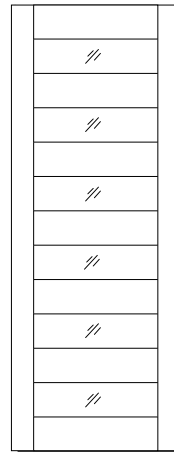


K-8003




K-8010

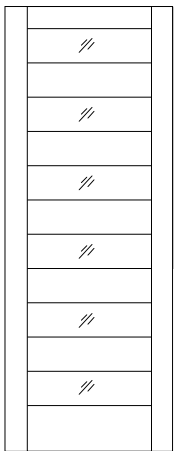


K-8011



K-8012

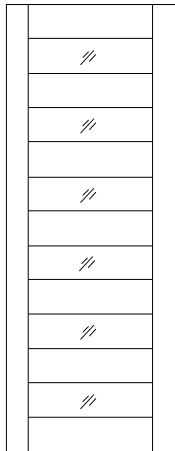

K-8013

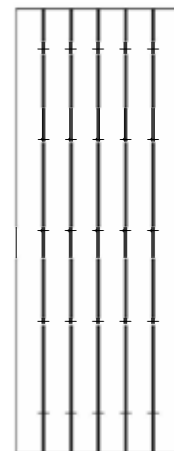

K-8100





AUTHENTIC WOOD

RICH BEAUTY IN EVERY STYLE

Authentic Wood doors showcase warmth and elegance. They elevate the sophistication of any room. Choose from a variety of wood species, panel configurations, and glass options to create the look you want.

AUTHENTIC WOOD DOOR OPTIONS

WOOD SPECIES

We offer a variety of wood species to match the look you want for your home. Receive your door primed to add your own paint color.



Primed



Pine



Knotty Pine



Knotty Alder




Oak


Additional species available via special order. Contact your JELD-WEN sales representative for more details.

STICKING PROFILES


Choose from traditional or contemporary sticking profiles.




1/2" FLAT PANEL
PROFILE P, O




3/4" DOUBLE-HIP
RAISED PANEL KA




3/4" DOUBLE-HIP
RAISED PANEL PROFILE PI




3/4" SINGLE-HIP
RAISED PANEL PROFILE O



3/4" V-GROOVE PANEL KA




9/16" SINGLE-HIP
RAISED PANEL PROFILE KP




9/16" V-GROOVE
PANEL PROFILE KP


AVAILABLE SIZES



6 WIDTHS BETWEEN 1'0" - 3'0"




HEIGHTS OF 6'8" OR 8'0"




THICKNESS OF 1-3/8"


RAISED PANEL




0022 KA
6'8" & 8'0"




0028 PI, KA, O
6'8" & 8'0"



0044 PI
6'8" & 8'0"



0066 PI, KP, O
6'8" & 8'0"




0028V KA
6'8" & 8'0"
V-Groove


Additional designs available via special order. Contact your JELD-WEN sales representative for more details.

SPECIES: P = PRIMED, PI = PINE, O = OAK, KP = KNOTTY PINE, KA = KNOTTY ALDER


FLAT PANEL




1011 P
6'8" & 8'0"




1022 P
6'8" & 8'0"




1033 P, O
6'8" & 8'0"




1035 P
6'8" & 8'0"



1055 P
6'8" & 8'0"




0028V KP, KA
6'8" & 8'0"
V-Groove




0022V KP
6'8" & 8'0"
V-Groove


LOUVERS



0730P P
6'8" & 8'0"
Plantation
2-1/4" Slats




0732P P
6'8" & 8'0"
Plantation
2-1/4" Slats




0730 P, PI
6'8" & 8'0"
Traditional
1-1/4" Slats

FRENCH DOORS


Door designs available with clear glass only




1501 P, PI
6'8" & 8'0"




1509 P, PI
6'8" & 8'0"




1510 P, PI, O
6'8" & 8'0"




1505 P, PI
6'8" & 8'0"




1515 P, PI, O
(2'4" TO 3'0")
6'8" & 8'0"



1512 P, PI
6'8" & 8'0"



1506 P, PI
6'8" & 8'0"



1518 P, PI
6'8" & 8'0"

SPECIES: P = PRIMED, PI = PINE, O = OAK DOORS

DECORATIVE GLASS SELECTIONS



REED
TEXTURED GLASS

PRIVACY RATING | 6
0 1 2 3 4 5 6 7 8 9 10




RAIN
TEXTURED GLASS

PRIVACY RATING | 9
0 1 2 3 4 5 6 7 8 9 10



STRADA
V-GROOVED GLASS

PRIVACY RATING | 8
0 1 2 3 4 5 6 7 8 9 10

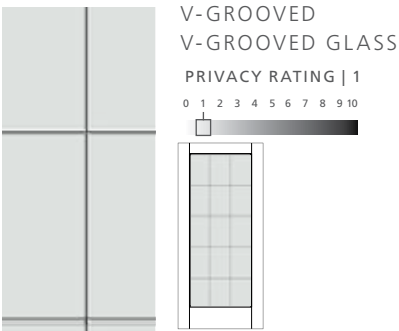


V-GROOVED
V-GROOVED GLASS

PRIVACY RATING | 1
0 1 2 3 4 5 6 7 8 9 10



LAUNDRY
SCREEN PRINT GLASS

PRIVACY RATING | 8
0 1 2 3 4 5 6 7 8 9 10

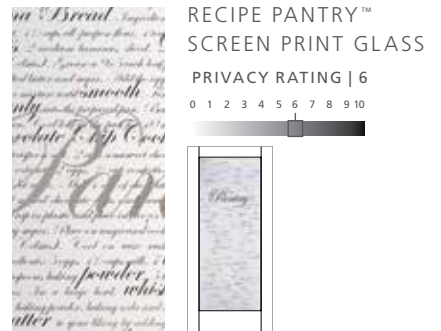


RECIPE PANTRY™
SCREEN PRINT GLASS

PRIVACY RATING | 6
0 1 2 3 4 5 6 7 8 9 10



PANTRY
SCREEN PRINT GLASS

PRIVACY RATING | 8
0 1 2 3 4 5 6 7 8 9 10

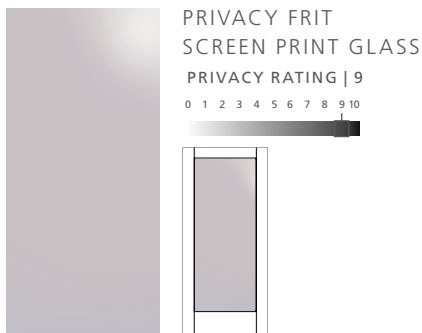

PRIVACY FRIT
SCREEN PRINT GLASS


PRIVACY RATING | 9
0 1 2 3 4 5 6 7 8 9 10




CRAFTSMAN
SCREEN PRINT GLASS

PRIVACY RATING | 7
0 1 2 3 4 5 6 7 8 9 10

DECORATIVE GLASS DOORS



1501P
8'0"



1501
6'8" & 8'0"



© 2024 JELD-WEN, Inc. All rights reserved. | JELD-WEN, the JELD-WEN Logo, the JW Logo, CAIMAN, CAMDEN, CARRARA, COLONIST, CONMORE, KARONA, MADISON, MODA, MONROE, PROCORE, and PROCORE THE QUIET DOOR are registered trademarks of JELD-WEN, Inc. BIRKDALE, CRAFTSMAN III, IMPRESSION, RECIPE PANTRY, ROCKPORT, SANTA FE, STATEMENT, STUDIO, and WOODVIEW are trademarks of JELD-WEN, Inc.

10-96390 05/24